


HU Series

HIGH VOLTAGE, LONG LIFE

高壓長壽命品


- Operating with wide temperature range -40~+105°C
適用於 -40~+105°C 的寬溫範圍
- Load life of 5000 hours
負荷壽命 5000 小時
- Comply with the RoHS directive
符合 RoHS 指令



□ SPECIFICATIONS 特性表

Items 項目	Characteristics 主要特性														
Operation Temperature Range 使用溫度範圍	-40 ~ +105℃														
Itage Range 額定工作電壓範圍	160 ~ 450V														
Capacitance Range 靜電容量範圍	2. 2 ~ 47μF														
Capacitance Tolerance 靜電容量允許偏差	±20% at 120Hz, 20℃														
Leakage Current 漏電流	Leakage current ≤0.04CV + 100μA, whichever is greater (after 2 minutes application of rated voltage) 漏電流 ≤0. 04CV + 100μA，取較大值（施加額定工作電壓 2 分鐘後）														
Dissipation Factor (tan δ) 損耗角正切	Measurement frequency 測試頻率: 120Hz, Temperature 溫度: 20℃ <table><tr><td>Rated Voltage (V) 額定工作電壓</td><td>160 ~ 250</td><td>400, 500</td></tr><tr><td>tan δ (max.) 最大損耗角正切</td><td>0.15</td><td>0.20</td></tr></table>			Rated Voltage (V) 額定工作電壓	160 ~ 250	400, 500	tan δ (max.) 最大損耗角正切	0.15	0.20						
Rated Voltage (V) 額定工作電壓	160 ~ 250	400, 500													
tan δ (max.) 最大損耗角正切	0.15	0.20													
Stability at Low Temperature 低溫特性	Measurement frequency 測試頻率: 120Hz <table><tr><td>Rated Voltage (V) 額定工作電壓</td><td>160 ~ 250</td><td>400, 500</td></tr><tr><td>Impedance Ratio 阻抗比</td><td>Z (-25℃) / Z (20℃)</td><td>3</td></tr><tr><td>ZT/Z20 (max.)</td><td>Z (-40℃) / Z (20℃)</td><td>6</td></tr><tr><td></td><td></td><td>10</td></tr></table>			Rated Voltage (V) 額定工作電壓	160 ~ 250	400, 500	Impedance Ratio 阻抗比	Z (-25℃) / Z (20℃)	3	ZT/Z20 (max.)	Z (-40℃) / Z (20℃)	6			10
Rated Voltage (V) 額定工作電壓	160 ~ 250	400, 500													
Impedance Ratio 阻抗比	Z (-25℃) / Z (20℃)	3													
ZT/Z20 (max.)	Z (-40℃) / Z (20℃)	6													
		10													
Load Life 高溫負荷特性	After 5000 hours (< Ø8, 3000 hours) application of the rated voltage at 105℃, they meet the characteristics listed below. 在 105℃ 環境中施加額定工作電壓 5000 小時（ < Ø8 產品，3000 時）後，電容器的特性符合下表的要求。 <table><tr><td>Capacitance Change 靜電容量變化率</td><td colspan="2">Within ±20% of initial value 初始值的±20%以內</td></tr><tr><td>Dissipation Factor 損耗角正切</td><td colspan="2">200% or less of initial specified value 不大於規範值的 200%</td></tr><tr><td>Leakage Current 漏電流</td><td colspan="2">initial specified value or less 不大於規範值</td></tr></table>			Capacitance Change 靜電容量變化率	Within ±20% of initial value 初始值的±20%以內		Dissipation Factor 損耗角正切	200% or less of initial specified value 不大於規範值的 200%		Leakage Current 漏電流	initial specified value or less 不大於規範值				
Capacitance Change 靜電容量變化率	Within ±20% of initial value 初始值的±20%以內														
Dissipation Factor 損耗角正切	200% or less of initial specified value 不大於規範值的 200%														
Leakage Current 漏電流	initial specified value or less 不大於規範值														
Shelf Life 高溫貯存特性	After leaving capacitors under no load at 105℃ for 1000 hours, they meet the specified value for load life characteristics listed above. 在 105℃ 環境中無負荷放置 1000 小時後，電容器的特性符合高溫負荷特性中所列的規定值。														
Resistance to Soldering Heat 耐焊接熱特性	After reflow soldering and restored at room temperature, they meet the characteristics listed below. 經過回流焊並冷卻至室溫後，電容器的特性符合下表的要求。 <table><tr><td>Capacitance Change 靜電容量變化率</td><td colspan="2">Within ±10% of initial value 初始值的±10%以內</td></tr><tr><td>Dissipation Factor 損耗角正切</td><td colspan="2">initial specified value or less 不大於規範值</td></tr><tr><td>Leakage Current 漏電流</td><td colspan="2">initial specified value or less 不大於規範值</td></tr></table>			Capacitance Change 靜電容量變化率	Within ±10% of initial value 初始值的±10%以內		Dissipation Factor 損耗角正切	initial specified value or less 不大於規範值		Leakage Current 漏電流	initial specified value or less 不大於規範值				
Capacitance Change 靜電容量變化率	Within ±10% of initial value 初始值的±10%以內														
Dissipation Factor 損耗角正切	initial specified value or less 不大於規範值														
Leakage Current 漏電流	initial specified value or less 不大於規範值														
Marking 標識	Black print on the case top. 鋁殼頂部黑字印刷。														

□ DRAWING (Unit: mm) 外形圖

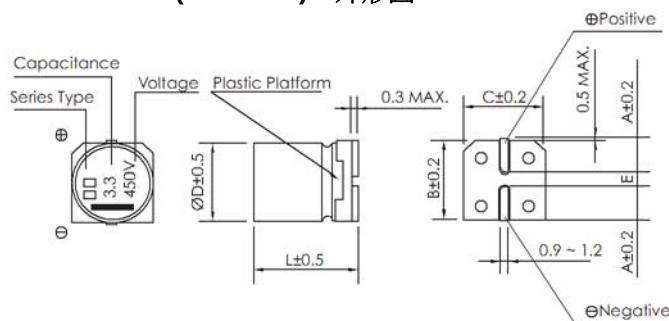

- A pressure relief vent is attached to products over ØD=8
ØD=8 以上產品有緩壓防爆閥

NOTE: All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的設計及特性參數僅供參考, 任何修改不作預先通知。如果在使用上有疑問, 請在採購前與我們聯繫, 以便提供技術上的協助。



HU Series

□ DIMENSIONS (Unit: mm) 尺寸表

ØD x L	6.3 x 10.5	8 x 10.5	8 x 12.5	10 x 12.5	12.5 x 13.5	12.5 x 16
A	2.6	3.0	3.2	3.2	4.7	4.7
B	6.6	8.3	8.3	10.3	13.0	13.0
C	6.6	8.3	8.3	10.3	13.0	13.0
E ± 0.2	1.9	3.1	3.1	4.6	4.6	4.6
L	10.5	10.5	12.5	12.5	13.5	16.0

□ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT 規格尺寸及最大允許紋波電流

WV Code 代碼 μF		160	200	250	400	450
		2C	2D	2E	2G	2W
1	010			6.3 x 10.5	23	
2.2	2R2	6.3 x 10.5	20	6.3 x 10.5	23	6.3 x 10.5
3.3	3R3	6.3 x 10.5	23	6.3 x 10.5	30	6.3 x 10.5
4.7	4R7	6.3 x 10.5	30	8 x 10.5	35	8 x 10.5
5.6	5R6					8 x 10.5
6.8	6R8	8 x 10.5	35	8 x 10.5	40	8 x 10.5
8.2	8R2					8 x 10.5
10	100	10 x 12.5	45	10 x 12.5	80	10 x 12.5
22	220	12.5 x 13.5	85	12.5 x 13.5	110	12.5 x 13.5
33	330	12.5 x 13.5	95	12.5 x 16	220	
47	470	12.5 x 16	260			

• Case size ØD x L (mm), ripple current (mA rms) at 105°C, 120Hz • 尺寸 ØD x L (mm), 紋波電流 (mA rms) 於 105°C, 120Hz

□ FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 紋波電流頻率補償系數

Frequency 頻率	50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient 系數	0.80	1.00	1.25	1.40	1.60

NOTE: All designs and specifications are for reference only and are subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。