


KB Series

WIDE TEMPERATURE

寬溫品


- Wide temperature range of $-40\sim+105^{\circ}\text{C}$
適用於 $-40\sim+105^{\circ}\text{C}$ 的寬溫範圍
- Standard series for general purposes
標準品通用型
- Load life of 2000 hours at 105°C
在 105°C 環境中負荷壽命 2000 小時
- Comply with the RoHS directive
符合 RoHS 指令



□ SPECIFICATIONS 特性表

Items 項目	Characteristics 主要特性	
Operation Temperature Range 使用溫度範圍	$-40\sim+105^{\circ}\text{C}$	$-25\sim+105^{\circ}\text{C}$
Voltage Range 額定工作電壓範圍	6.3 ~ 100V	160 ~ 450V
Capacitance Range 靜電容量範圍	0.47 ~ 15000 μF	0.47 ~ 470 μF
Capacitance Tolerance 靜電容量允許偏差	$\pm 20\%$ at 120Hz, 20°C	
Leakage Current 漏電流	Leakage current = 0.01CV or 3 μA , whichever is greater (after 2 minutes application of rated voltage) 漏電流 = 0.01CV 或 3 μA , 取較大值 (施加額定工作電壓 2 分鐘後) Leakage current = 0.02CV + 15 μA (after 5 minutes application of rated voltage) 漏電流 = 0.02CV + 15 μA (施加額定工作電壓 5 分鐘後)	
Dissipation Factor (tan δ) 損耗角正切	When nominal capacitance is over 1000 μF , tan δ shall be added 0.02 to the listed value with increase of every 1000 μF . 當標稱靜電容量大於 1000 μF , 其標稱靜電容量每增加 1000 μF , 損耗角正切增加 0.02. Measurement frequency 測試頻率: 120Hz, Temperature 溫度: 20°C	
Stability at Low Temperature 低溫特性	Rated Voltage (V) 額定工作電壓	6.3 10 16 25 35 50 63 100 160~250 350~450
	tan δ (max.) 最大損耗角正切	0.24 0.20 0.16 0.14 0.12 0.10 0.09 0.08 0.15 0.20
	Measurement frequency 測試頻率: 120Hz	
Load Life 高溫負荷特性	Rated Voltage (V) 額定工作電壓	6.3 10 16 25~100 160~350 400,450
	Impedance Ratio $Z(-25^{\circ}\text{C}) / Z(20^{\circ}\text{C})$	4 3 2 2 3 8
	Impedance Ratio $Z(-40^{\circ}\text{C}) / Z(20^{\circ}\text{C})$	8 6 4 3 4 —
Shelf Life 高溫貯存特性	After 2000 hours ($\varnothing 5\sim\varnothing 8$ products are for 1000 hours) application of the rated voltage at 105°C , they meet the characteristics listed below. 在 105°C 環境中施加額定工作電壓 2000 小時 ($\varnothing 5\sim\varnothing 8$ 產品為 1000 小時) 後, 電容器的特性符合下表的要求。	
	Capacitance Change 靜電容量變化率	Within $\pm 20\%$ of initial measured value 初始值的 $\pm 20\%$ 以內
	Dissipation Factor 損耗角正切	$\leq 200\%$ of initial specified value 不大於規範值的 200%
Marking 標識	Printed with white colour on black sleeve (PET) or printed with white colour on green sleeve (PVC). 黑色膠管白字印刷 (PET) 或綠色膠管白字印刷 (PVC)。	

□ DRAWING (Unit: mm) 外形圖

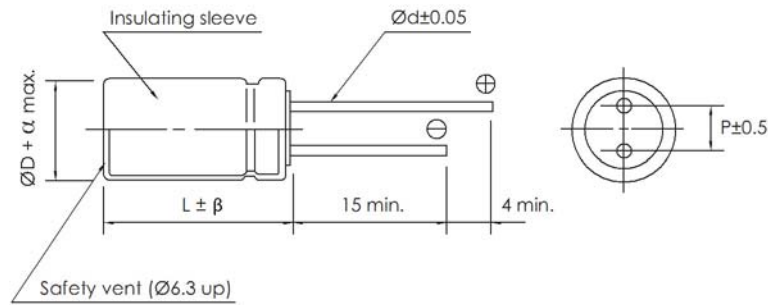

ØD	5	6.3	8 (L≤11.5)	8 (L≤16)	10	13	16	18	22	25
P	2.0	2.5	3.5	5.0	7.5	10.0	12.5			
Ød	0.5	0.6	0.8							
β	1.5	2.0								
α	0.5	1.0								

□ FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT 紋波電流頻率補償系數

Frequency 頻率		50Hz	120Hz	300Hz	1KHz	10KHz~
Coefficient 係數	0.47 ~ 47μF	0.75	1.00	1.35	1.55	2.00
	68 ~ 680μF	0.80	1.00	1.25	1.34	1.50
	1000 ~ 15000μF	0.85	1.00	1.10	1.13	1.15

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的設計及特性參數僅供參考, 任何修改不作預先通知。如果在使用上有疑問, 請在採購前與我們聯繫, 以便提供技術上的協助



□ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT 規格尺寸及最大允許紋波電流

WV Code 代碼		6.3		10		16		25		35		50		63	
μF		0J		1A		1C		1E		1V		1H		1J	
0.47	R47											5 x 11	8	5 x 11	8
0.68	R68											5 x 11	9	5 x 11	9
1	010											5 x 11	11	5 x 11	13
2.2	2R2											5 x 11	20	5 x 11	15
3.3	3R3											5 x 11	30	5 x 11	19
4.7	4R7											5 x 11	33	5 x 11	22
6.8	6R8											5 x 11	42	5 x 11	34
10	100					5 x 11	50	5 x 11	38	5 x 11	41	5 x 11	50	5 x 11	50
22	220			5 x 11	50	5 x 11	54	5 x 11	57	5 x 11	61	5 x 11 (6.3x11.5)	78 (85)	6.3 x 11.5	86
33	330			5 x 11	60	5 x 11	64	5 x 11	69	5 x 11	75	6.3 x 11.5	95	6.3 x 11.5	100
47	470	5 x 11	62	5 x 11	71	5 x 11	80	5 x 11	106	5 x 11 (6.3x11.5)	106 (110)	6.3 x 11.5	125	6.3 x 11.5	130
68	680	5 x 11	80	5 x 11	83	5 x 11	85	5 x 11	114	6.3 x 11.5	121	8 x 11.5	144	8 x 11.5	128
100	101	5 x 11	95	5 x 11	100	5 x 11 (6.3x11.5)	120 (135)	5 x 11 (6.3x11.5)	120 (145)	6.3 x 11.5 (8x11.5)	150 (180)	8 x 11.5 (10x12)	188 (200)	8 x 11.5 (10x12)	200 (295)
120	121									8 x 11.5	260				
220	221	5 x 11	150	5 x 11 (6.3x11.5)	155 (175)	6.3 x 11.5	190	6 x 12 6.3 x 11.5 (8x11.5) 8 x 12	190 190 (236) 245	8 x 11.5	270	8 x 12 10 x 12 (10x16)	285 345 (370)	10 x 12	390
330	331	6.3 x 11.5	170	6.3x7 6.3 x 11 (10x12)	165 200 200	8 x 11.5	270	8 x 11.5 (10x12)	310 (335)	10 x 12 (8x16)	395 (455)	10 x 16 (10x20)	420 (460)	10 x 20 (13x21)	510 (560)
470	471	6.3 x 11.5	230	6.3 x 11.5 (8x11.5) (10x12)	260 (290) (320)	8 x 11.5	310	8 x 11.5 (8x16) (10x12)	325 (350) (380)	10 x 16 (10x20) 8 x 16 8 x 20	520 (550) 462 495	10 x 20	560	13 x 21 (13x25)	650 (700)
680	681	6.3 x 10 8 x 11.5	245 314	8 x 11.5 (8x16)	345 (390)	8 x 16 (10x16)	480 (520)	10 x 16	520	10 x 16 (10x20)	550 (590)	13 x 25	720	13 x 25 (16x25)	780 (800)
820	821					8 x 16	510								
1000	102	8 x 11.5	380	8 x 11.5 (8x16) (10x12)	400 (425) (585)	8 x 20 (10x16) (10x20) 10 x 12	580 (645) (700) 605	10 x 16 (10x20) (13x21)	705 (775) (845)	10 x 20 12.5 x 20 13 x 21 (13x25)	785 785 810 (930)	13 x 25 (16x25)	950 (1080)	16 x 25	930
1500	105							12.5 x 25	925						
2200	222	10 x 12 (10x16)	630 (690)	10 x 20 (13x21)	760 (815)	10 x 20 (13x21)	735 (760)	12.5 x 20 13 x 21 (13x25)	950 890 (1110)	13 x 25 (16x25)	1080 (1260)	16 x 30 16 x 35 (18x35)	1470 1470 (1530)	16 x 31 (18x35)	1565 (2180)
3300	332	10 x 20 (13x21)	845 (920)	13 x 25	1130	13 x 21 (13x25)	980 (1170)	16 x 25	1440	16 x 31 (16x35)	1420 (1480)	18 x 35	1770	22 x 40	2510
4700	472	13 x 25	1240	13 x 25	1280	16 x 25	1320	16 x 25 16 x 31	1550 1650	18 x 35	1900	22 x 40	2340	25 x 40	3000
6800	682	16 x 25	1480	16 x 31	1510	16 x 31	1930	16 x 35.5 18 x 35	1950 2160	22 x 40	2216	25 x 40	2530		
10000	103	16 x 31	1920	16 x 35	2220	16 x 35.5 18 x 35	2140 2350	18 x 35	2450						
15000	153	18 x 31	2390												

WV Code 代碼		100		160		200		250		350		400		450	
μF		2A		2C		2D		2E		2V		2G		2W	
0.47	R47	5 x 11	14	5 x 11	12	5 x 11	12	5 x 11	12	6.3 x 11.5	12	6.3 x 11.5	12	6.3 x 11.5	12
0.68	R68	5 x 11	15	5 x 11	13	5 x 11	13	5 x 11	13	6.3 x 11.5	13	6.3 x 11.5	13	8 x 11.5	13
1	010	5 x 11	19	5 x 11	16	5 x 11	16	6.3 x 11.5	16	6.3 x 11.5	16	6.3 x 11.5 (8x11.5)	21 (25)	8 x 11.5	27
2.2	2R2	5 x 11	30	6.3 x 11.5	23	6.3 x 11.5	30	6.3 x 11.5	35	8 x 11.5	38	6.3 x 11.5 (8x11.5)	32 (39)	8 x 11.5	39
3.3	3R3	5 x 11	32	6.3 x 11.5	34	6.3 x 11.5	39	8 x 11.5	42	8 x 11.5	43	6.3 x 11.5 (8x11.5)	40 (45)	8 x 11.5	45
4.7	4R7	5 x 11	38	6.3 x 11.5	40	8 x 11.5	46	8 x 11.5 6.3 x 11	45 34	10 x 12	55	8 x 11.5 (10x12)	50 (55)	8 x 11.5 (10x12)	50 (55)
6.8	6R8	5 x 11	52	8 x 11.5	48	8 x 11.5	52	8 x 11.5 (10x12)	52 (57)	10 x 16	62	8 x 12 8 x 16 (10x16)	55 65 (80)	10 x 16	90
10	100	5 x 11 (6.3x11.5)	66 (73)	8 x 11.5 (10x12)	65 (60)	8 x 11.5 (10x12)	65 (70)	10 x 12 (10x16) 8x 11.5	92 (116) 52	10 x 16	95	8x11.5 8 x 12 10 x 16 (10x20)	55 60 95 (105)	10 x 16 10 x 20 13 x 21	95 105 125
15	15R											10x 16 12.5x17	115 135		
												Case size 尺寸		Ripple current 紋波電流	

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注: 以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。



□ DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT 規格尺寸及最大允許紋波電流

WV Code 代碼 μF		100		160		200		250		350		400		450	
		2A		2C		2D		2E		2V		2G		2W	
22	220	6.3 x 11.5	104	10 x 16	96	10 x 16	140	10 x 17 (10x20)	140 (145)	13 x 21	220	12.5 x 17 13 x 21 (13x25) (16x20)	150 160 (170) (185)	13 x 25	185
33	330	8 x 11.5	150	10 x 20	155	10 x 20	170	13 x 21	190	13 x 25	215	12.5 x 25 13 x 25 (16x25)	185 185 (245)	12.5 x 30 16 x 20 (16x25)	280 207 (260)
47	470	8 x 11.5 10 x 12	170 190	13 x 21	220	13 x 21	220	13 x 25	250	16 x 25	285	16 x 25 (16x31)	295 (320)	16 x 25 (16x31)	305 (313)
68	680	10 x 16	239	13 x 21	275	13 x 25	270	16 x 25	365	16 x 31	370	16 x 26 16 x 31 (16x35)	305 350 (405)	16 x 35 (18x31)	435 (450)
82	820											18x 25	765		
100	101	10 x 20 10 x 16	320 140	13 x 25	355	16 x 25	385	16 x 31 18 x 20	485 485	18 x 35	485	18x31 (18x35)	420 (540)	18 x 35 (18x40)	520 (560)
120	121													18 x 35	550
150	151					13 x 30	435								
220	221	13 x 25	450	16 x 31	660	16 x 35 (18x31)	695 (755)	18 x 35	760						
330	331	13 x 25 16 x 25	625 720	18 x 35	820	18 x 35 (18x40)	820 (965)								
470	471	16 x 25	780	18 x 40	975	22 x 40	1050							Case size 尺寸	Ripple current 紋波電流
680	681	16 x 35	1021												
1000	102	18 x 40	1344												

•Case size ∅D×L(mm), ripple current (mA rms) at 105°C, 120Hz •尺寸∅D×L(mm), 紋波電流(mA rms)於 105°C, 120Hz

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.

注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助

